

PAD PRINT <WHITE>
Refer to separate file, "Date Code Format"

xx.xM XYZ

Specified Cable Length Week Year

Orientation Instruction Sheet Details:

| | |
|---------------------|---|
| <p>Front</p> | <p>Back</p> <p>Connection Guidelines</p> <p>Mating Face View</p> |
|---------------------|---|

ALY CE LABEL DETAIL

Refer to separate file "ALY CE Format"

Specify AT Part Number

ATPN
Alysium-Tech GmbH
Andernacher Str.31b, 90411 Nuremberg, Germany

NOTE:
Label position must be on the top left side before the sealing line of the PE bag

UNIT : mm
UNLESS OTHERWISE SPECIFIED
ASSY LENGTH TOLERANCE

- < 150mm = ±10
- ≥ 150mm and < 250mm = ±15
- ≥ 250mm and < 500mm = ±20
- ≥ 500mm and < 1000mm = ±30
- ≥ 1000mm and < 5000mm = ±50
- 5000mm and above = ±100


This document is the property of Alysium-Tech. It must not be copied or otherwise disclosed without prior written consent

RoHS COMPLIANT

BILL OF MATERIALS

| Item | Description |
|------|--|
| 1 | 10P(1.27) DRsI (DCT) A81-9756 (1.27mm Pitch Dual Row Board To Board 10P Dual Row) |
| 2 | A11-3069 [OD=4.5mm] <BLK> |
| 3 | UL20276 9C#30(7/0.10) |
| 4 | Processed End - Flat Cut |
| 5 | Cable Label (White Pad Print) |
| 6 | Orientation Instruction Sheet |
| 7 | Heat Seal PE Bag |
| 7 | Label On Bag (ALY CE) |

WIRING DIAGRAM

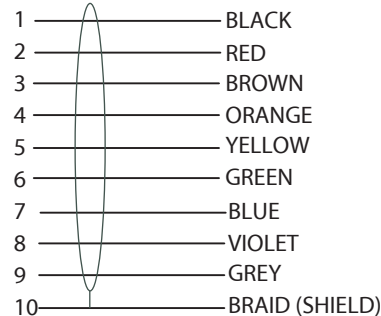

PACKAGING DETAIL

